

OSA 5230 GPS Receiver

A compact, cost efficient, high quality GPS-based synchronisation solution for OEM & integrators

Oscilloquartz proudly announces the addition of a new compact 5230 GPS Receiver to its portfolio of cost-efficient synchronisation solutions for OEM and system integrators.

The 5230 GPS is specifically designed for the synchronisation of 2G, 2.5G and 3G mobile telecommunications networks, SDH/SONET transport networks as well as of transport ATM, LAN/WAN, utilities.

Digital broadcasting and mobile location services such as E911 can also take advantage of this compact and economical synchronisation solution.

The 5230 GPS integrates the same GPS engine already present in Oscilloquartz' highly successful top-of-the-line OSA 5581C GPS-SR and 453x GPS-SB series, into a 2U-high, 19" sub-rack format, complete with an integrated power supply(18-60V) and output module providing 8 output signals.

The new OSA 5230 GPS Receiver conforms to G.811-/Stratum 1 quality synchronisation reference while providing 8 individually configurable outputs at a fraction of the cost of currently available solutions.

The OSA 5230 GPS Receiver incorporates an integrated GPS receiver and a highly accurate oven-controlled oscillator, which filters the received signal and provides a holdover quality typical of an SSU/BITS during an eventual loss of GPS signal or antenna failure.

The OSA 5230 GPS Receiver is the natural choice as a synchronisation source for UMTS, WCDMA and CdmaOne, Cdma 2000, as well as GPRS, CDMA and TDMA base station and mobile switches.

Management Software

The OSA 5230 GPS Receiver can be managed by any Windows based PC connected to the equipment via an



RS-232 connection and running the Configuration and Monitoring software (CM SW).

The CM SW application provides an intuitive, easy-to-use access for configuring the unit and examine its current status such as the visible GPS satellites, the unit's operational state, the status of the outputs, of the internal oscillator and so on.

The unit also provides an alarm relay contact allowing existing communication system to retrieve basic status information.

*Option BVA


Provides 1 direct low noise frequency output and high accuracy hold over ($\Delta f/f < 2 \times 10^{-11}$ day, MTIE $< 1 \mu s/24h$).

For each individual output; the following output types may be selected, using a set of switches situated on the rear panel of the unit :

- 2.048 Mbit/s (E1) compliant with ITU-T G.703-9
- 2.048 MHz compliant with ITU-T G.703-13
- 1 PPS, phase-locked to UTC
- 10 MHz, phase-locked to UTC

OPTIONS: Following options can be provided upon request for quantity orders (please contact your OSA representative for availability and details):

- 8600 BVA oscillator
- Rubidium oscillator
- 1.544 Mbit/s (T1/DS1) outputs
- 64/8 KHz Composite Clock (CC) outputs
- Additional outputs
- Pure signal distributor (auxiliary input as a reference/no GPS input)
- Special connectors and/or impedances

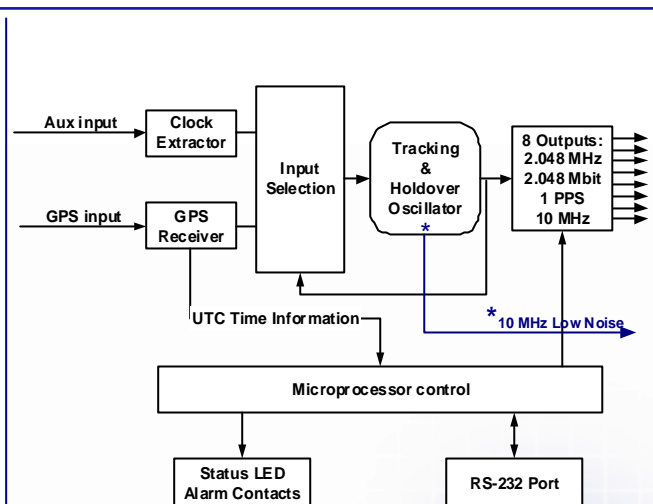

OSA 5230 GPS Block Diagram


*For BVA option only

The leading partner for your synchronisation needs

Technical specifications 5230

Typical Applications

- Cellular networks like UMTS, GPRS and CDMA
- Wireless and wireline telecom synchronisation
- State and federal communication systems simulcast
- Time and frequency reference for test equipment and instruments
- Specialised ATM and LAN/WAN synchronisation requirements
- Satellite ground stations equipment
- Time and frequency reference for power utilities and public services
- Any systems requesting highly accurate Time & Frequency references
- DAB and DVB broadcasting systems

Performance when locked to GPS-signal (w/out SA): <ul style="list-style-type: none"> ➤ 1 PPS accuracy: 50 ns to UTC ➤ 1 PPS stability: ➤ < 100 ns pp (@ constant temperature) ➤ < 150 ns pp (fluctuating temp., -5°C to +55°C) ➤ ADEV < 10⁻¹² (20000 seconds) 	Output signals: <ul style="list-style-type: none"> ➤ 1 PPS: 200 ms width, rise time ≤ 20 ns, AC-MOS, 50 ohms ➤ 10 MHz, 1 Vrms sine, 50 ohms ➤ 2.048 MHz compliant to G.703-13, 75 ohms unbalanced ➤ 2.048 Mbps (E1) compliant to G.703-9, 75 ohms unbalanced 												
Power supply: <ul style="list-style-type: none"> ➤ 18-60 VDC ➤ Consumption: < 11W during warm-up, < 7W steady state 25°C 	Management: <ul style="list-style-type: none"> ➤ RS-232C connector ➤ 1 x Relay contact ➤ TOD (Time-Of-Day) output compliant to NMEA0183, on RS-232C connector 												
Configuration and Monitoring software: <ul style="list-style-type: none"> ➤ Runs on any IBM-compatible PC with Windows 98/NT/2000/XP 	Environmental characteristics: <ul style="list-style-type: none"> ➤ Operational: -5°C to +60°C ➤ Storage: -40°C to +85°C ➤ Humidity: 95% non-condensing 												
Holdover performance: <ul style="list-style-type: none"> ➤ Long term stability: 1x10⁻¹⁰/day, 2x10⁻⁸/year ➤ Frequency stability: 6x10⁻¹⁰ pp (-5°C to +55°C) ➤ PPS accuracy: < 7µs after 24 hours, at constant temperature ➤ PPS accuracy: < 7µs after 8 hours, at variable temperature 	Antenna Cables (connectors included): <ul style="list-style-type: none"> ➤ 10 meters (RG213) ➤ 20 meters (RG58) ➤ 60 meters (RG213) ➤ 120 meters (2 x 60 meters RG213, active line amplifier) ➤ up to 300 meters: CellFlex cable 												
Antenna Data (other active antennas possible): <ul style="list-style-type: none"> ➤ Frequency: L1 (1575 MHz) ➤ Polarization: Right-Hand Circular ➤ Polarization VSWR: 2:1 ➤ Gain: 35 dB (nominal) ➤ Noise: 2.75 dB (nominal) ➤ Pass-band width: 50 MHz ➤ Azimuth: 360° (omni-directional) ➤ Elevation: 0° to 90° (hemispherical) ➤ Power supply: +5V DC (±10%) ➤ Consumption: 22 mA (nominal) 	Physical dimensions (antenna): <ul style="list-style-type: none"> ➤ \varnothing77.3 mm (3.04"), H: 74.6 mm (2.94") ➤ Weight: 100 grams Environmental characteristics (antenna): <ul style="list-style-type: none"> ➤ Operational: -40°C to +85°C ➤ Storage: -55°C to +100°C ➤ Vibration: 0.04 g2/Hz (10 Hz to 500 Hz) ➤ 0.03 g2/Hz (501 Hz to 850 Hz) ➤ 0.02 g2/Hz (851 Hz to 1200 Hz) ➤ Shock: 40 gram ➤ Humidity: 95% non-condensing ➤ Salt Fog: Mil. Std. 202F, Method 101D Cond. B ➤ Waterproof: Submersion to 1 meter 												
Highlights: <ul style="list-style-type: none"> ➤ Reliable, low cost, compact GPS receiver ➤ 8 outputs individually configurable by switches ➤ Optional auxiliary input: E1 or frequency ➤ G.703 compliant E1 and 2.048 MHz outputs ➤ UTC locked 1 PPS and 10 MHz outputs ➤ BNC connectors for all inputs and outputs 	<ul style="list-style-type: none"> ➤ TOD compliant to NMEA0183 ➤ Simultaneous tracking of up to 8 satellites ➤ Integrated high stability holdover functionality : ITU-T G.811 / Stratum 1 compliant when locked to GPS ➤ ITU-T G.812 (I, V, VI) compliant holdover ➤ ITU-T G.812 (I, V, VI) filtering of auxiliary input 												
BVA Option : Std 10 MHz <ul style="list-style-type: none"> ➤ Phase noise : <table style="margin-left: 20px;"> <tr><td>1Hz:</td><td>-90 dBc</td></tr> <tr><td>10Hz:</td><td>-125 dBc</td></tr> <tr><td>100Hz:</td><td>-140 dBc</td></tr> <tr><td>1kHz:</td><td>-140 dBc</td></tr> <tr><td>10kHz:</td><td>-140 dBc</td></tr> <tr><td>100kHz:</td><td>-140 dBc</td></tr> </table> 	1Hz:	-90 dBc	10Hz:	-125 dBc	100Hz:	-140 dBc	1kHz:	-140 dBc	10kHz:	-140 dBc	100kHz:	-140 dBc	<ul style="list-style-type: none"> ➤ Harmonics: -40dB ➤ Non-Harmonics: -70dB ➤ Output : 1x10MHz at 50Ω ➤ Amplitude: 7dBm at ±1 dBm ➤ Phase-time (holdover): 1µ/day ➤ Frequency Holdover: 2x10⁻¹¹/day ➤ Temperature sensitivity (frequency): 2x10⁻¹⁰ (-5°C to +55°C) 
1Hz:	-90 dBc												
10Hz:	-125 dBc												
100Hz:	-140 dBc												
1kHz:	-140 dBc												
10kHz:	-140 dBc												
100kHz:	-140 dBc												

Version: 06/July 2006/0/RIS

Oscilloquartz SA reserves the right to change all specifications contained herein at any time without prior notice.

The leading partner for your synchronisation needs